


# Dynamo Eyebolts - Quality Range

## metric coarse thread

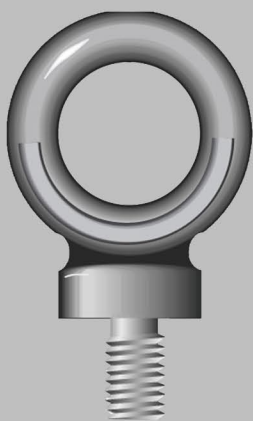

- Material:** BS970-080A27 hardened and tempered  
**Safety Factor:** MBL equals 5 x SWL  
**Standard:** BS4278 - table 3 - 1984  
**Finish:** Self colour  
**Certificate:** This product is supplied with an EC declaration of conformity, upon request a certificate of basic raw material  
**Note:** Electro galvanised (zinc plated) also available - prices on request  
**Special Note:** These eyebolts are for a vertical lift only

safe working load	diameter thread	diameter eye inside	diameter eye	length base to centre	thread length	base height	diameter base	product code	weight each
tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm		kg
* 0.10	6	22	9	27	18	5	17	22001A	0.07
* 0.15	8	22	9	27	18	5	17	22002A	0.07
* 0.25	10	22	9	27	18	5	17	22003A	0.07
0.32	12	22	9	27	18	5	17	22004A	0.07
* 0.50	14	29	11	34	23	6	23	22005A	0.24
* 0.63	16	29	11	34	23	6	23	22006A	0.14
* 1.00	18	40	15	47	32	9	32	22007A	0.40
1.25	20	40	15	47	32	9	32	22008A	0.40
* 1.60	22	44	17	53	35	14	35	22009A	0.61
* 2.00	24	51	19	60	40	12	40	22010A	0.80
* 3.20	30	64	24	76	51	14	51	22012A	1.72

sizes marked \* are additional and proportional to the specification

