


Green Pin® Sockets G-6412

open spelter socket

Material: High tensile steel
Finish: Hot dipped galvanised
Temp Range: Minus 20°C up to 200°C
Certificate: This product is supplied with an EC declaration of conformity upon request a proof load certificate

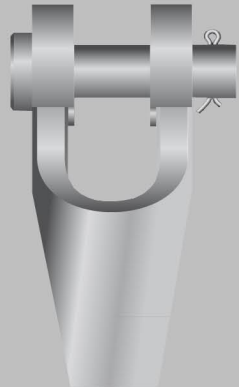

No.	minimum breaking load	diameter wire rope	length	width	width inside	dia pin	length inside	opening	product code	weight each
	tons	mm	a mm	b mm	c mm	d mm	e mm	f mm		kg
196	8	6 - 7	109	51	19	16	30	8.5	51999	0.4
197	12	8 - 10	124	63	21	21	34	12	52000	0.8
198	20	11 - 13	143	67	26	25	37	15	52001	1.0
199	25	14 - 16	172	85	33	30	49	18	52002	1.8
100	40	18 - 19	205	98	38	35	58	21	52003	3.0
104	55	20 - 22	235	111	44	41	68	24	52004	4.6
108	75	23 - 26	275	132	51	51	75	28	52005	8.0
111	90	27 - 30	306	144	57	57	85	32	52006	11.0
115	125	31 - 36	338	155	63	63	95	38	52007	16.0
118	150	37 - 39	394	180	76	70	127	41	52008	23.0
120	170	40 - 42	418	187	76	76	127	44	52009	27.0
125	225	43 - 48	468	213	89	89	133	51	52010	41.0
128	280	49 - 54	552	240	101	95	180	57	52011	58.0
130	360	55 - 60	598	270	113	108	196	63	52012	85.0
132	425	61 - 68	654	303	127	121	212	73	52013	125.0
135	460	69 - 75	696	349	133	127	215	79	52014	155.0
138	560	76 - 80	737	371	146	133	219	86	52015	173.0
140	625	81 - 86	788	391	159	140	228	92	52016	230.0
142	720	87 - 93	852	411	171	152	242	99	52017	265.0
144	875	94 - 102	914	447	191	178	254	108	52018	370.0
146	1200	108 - 115	1160	489	206	193	367	125	52019	525.0
150	1300	120 - 130	1250	525	225	220	390	138	52020	735.0

