




# Green Pin® Dee Shackles G-4159

with square sunken hole screw pin

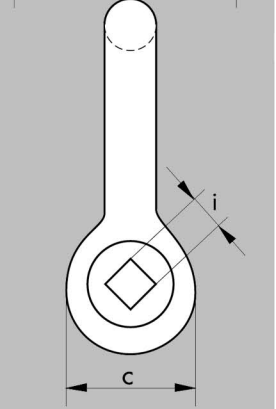

- Material:** Bow and pin high tensile steel, Grade 6, quenched and tempered  
**Safety Factor:** MBL equals 6 x WLL  
**Standard:** Meets performance requirements of US Fed Spec RR-C-271, Grade A  
**Finish:** Hot dipped galvanised  
**Certificate:** As standard an EC declaration of conformity is supplied, also upon request a basic raw material cert, manufacturer test cert, and inspection cert  
**Note:** Key for unscrewing the pin must be ordered separately (see below)

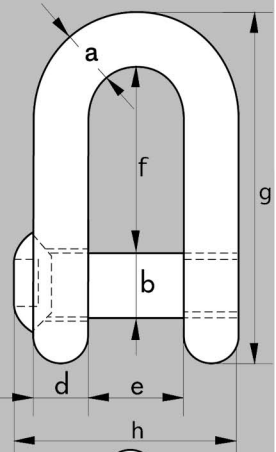

WLL	dia bow	dia pin	dia eye	width eye	width inside	length inside	length	length bolt	size hole	product code	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm		kg
2	13.5	16	34	13	22	43	81	51	11	15001	0.34
3.25	16	19	40	16	27	51	97	53	11	15002	0.60
4.75	19	22	46	19	31	59	112	74	11	15003	0.98
6.5	22	25	52	22	36	73	134	85	13	15004	1.26
8.5	25	28	59	25	43	85	154	99	13	15005	2.14
9.5	28	32	66	28	47	90	167	110	17	15006	3.05
12	32	35	72	32	51	94	180	122	17	15007	3.56
13.5	35	38	80	35	57	115	209	135	17	15008	5.17
17	38	42	88	38	60	127	230	145	17	15009	6.84

## Key Prices

shackle size ton	product code
2.0 - 4.75	15201
6.5 - 8.5	15202
9.5 - 17	15203