


Green Pin® Sockets G-6423

open wedge socket with safety bolt

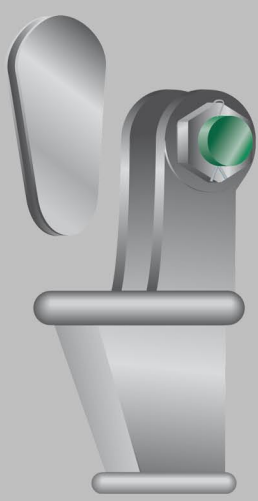

Material: High tensile steel
Standard: Generally to EN13411-6
Finish: Hot dipped galvanised
Temp Range: Minus 20°C up to 200°C
Certificate: This product is supplied with an EC declaration of conformity upon request a proof load certificate

No.	MBL	dia	length	length	width	width	pin	side	eye	product	weight
		wire		to centre	inside	dia	plate	dia	code		
	tons	mm	a	b	c	d	e	f	g		kg
		mm	mm	mm	mm	mm	mm	mm	mm		
0.25	8	7 - 8	128	110	76	18	16	9	36	53501	0.80
0.5	12	9 - 10	165	142	91	20	20	11	46	53502	1.50
1	20	11 - 13	175	146	109	25	25	12	57	53503	2.40
2	25	14 - 16	211	176	133	31	30	15	70	53504	4.00
3	40	18 - 19	252	212	145	38	35	16	80	53505	7.00
4	55	20 - 22	288	240	161	44	41	19	95	53506	11.00
5	75	24 - 26	329	274	189	51	50	22	110	53507	16.00
6	90	27 - 29	375	310	208	57	57	25	130	53508	21.00
7	110	30 - 32	423	350	226	63	63	28	146	53509	30.00
8	125	34 - 36	474	400	233	69	65	28	148	53510	37.00
9	150	37 - 39	527	450	246	76	70	30	153	53511	51.00
10	170	40 - 42	580	500	256	76	77	33	160	53512	64.00

