

Short Link Chain

Mild steel, commercial quality

Not to be used for lifting applications


Material: Mild steel, grade 3

Safety Factor: Service load 4:1

Finish: Hot dipped galvanised

Note: The minimum breaking load shown below is for guidance only,

Note: Self colour also available - prices on request

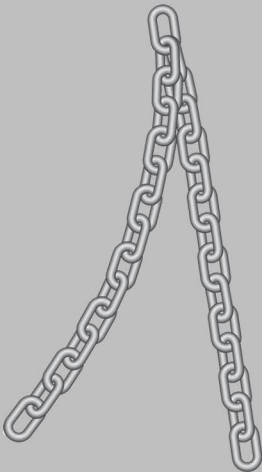

diameter	diameter	length inside	width outside	minimum breaking load	product code	weight per metre
a inch	a mm	b mm	c mm	kg		kg
3/16	5	19	17	1250	76501	0.50
1/4	6	18.5	20	1600	76502	0.78
5/16	8	24	28	3000	76503	1.40
3/8	10	30	34	5000	76504	2.20
1/2	12	36	46	7000	76505	3.20
5/8	16	45	54	12500	76506	5.60
3/4	20	60	70	20000	76507	8.50

