


# Eyebolts with Oval Link

## metric coarse thread

**Material:** BS970-080A27 hardened and tempered  
**Safety Factor:** MBL equals 5 x SWL  
**Standard:** BS4278 - table 2 - 1984  
**Finish:** Self colour  
**Certificate:** This product is supplied with an EC declaration of conformity, upon request a certificate of basic raw material

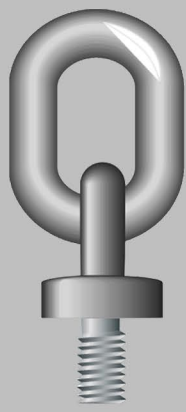

safe working load	diameter thread	diameter link	length link inside	width link inside	height base to centre	thread length	diameter base	product code	weight each
tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm		kg
* 0.10	8	13	53	24	20	27	39	24001	0.33
* 0.15	10	13	53	24	20	27	39	24002	0.35
* 0.20	12	13	53	24	20	27	39	24003	0.36
* 0.30	14	13	53	24	20	27	39	24004	0.37
* 0.40	16	13	53	24	20	27	39	24005	0.38
* 0.70	18	13	53	24	20	27	39	24006	0.39
1.00	20	13	53	24	20	27	39	24007	0.40
* 1.30	22	15	63	29	23	32	47	24008	0.65
1.60	24	15	63	29	23	32	47	24009	0.66
2.50	30	19	80	37	30	41	60	24010	1.31
4.00	36	24	102	46	38	52	75	24011	2.69
* 4.50	42	30	126	58	47	65	94	24012	5.31
* 5.00	45	30	126	58	47	65	94	24013	5.35
6.30	48	30	126	58	47	65	94	24014	5.50

sizes marked \* are additional and proportional to the specification

