


Green Pin® Bow Shackles G-4169

with square sunken hole screw pin



- Material:** Bow and pin high tensile steel, Grade 6, quenched and tempered
Safety Factor: MBL equals 6 x WLL
Standard: Meets performance requirements of US Fed Spec RR-C-271, Grade A
Finish: Hot dipped galvanised
Certificate: As standard an EC declaration of conformity is supplied, also upon request a basic raw material cert, manufacturer test cert, and inspection cert
Note: Key for unscrewing the pin must be ordered separately (see above)

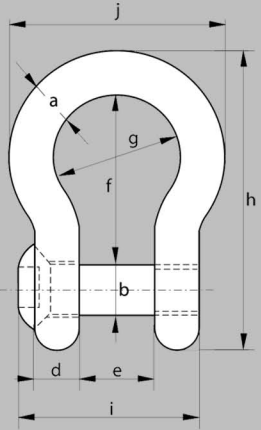

WLL	dia bow	dia pin	dia eye	width eye	width inside	length inside	width bow	length	length bolt	product code	weight each	product code	weight each
tons	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm		kg
2	13.5	16	34	13	22	51	32	89	51	58	11	15101	0.31
3.25	16	19	40	16	27	64	43	110	63	75	11	15102	0.56
4.75	19	22	46	19	31	76	51	129	74	89	11	15103	0.98
6.5	22	25	52	22	36	83	58	144	85	102	13	15104	1.46
8.5	25	28	59	25	43	95	68	164	99	118	13	15105	2.18
9.5	28	32	66	28	47	108	75	185	110	131	17	15106	3.06
12	32	35	72	32	51	115	83	201	122	147	17	15107	4.24
13.5	35	38	80	35	57	133	92	227	135	162	17	15108	5.59
17	38	42	88	38	60	146	99	249	145	175	17	15109	7.37

Key Prices

shackle size ton	product code
2.0 - 4.75	15201
6.5 - 8.5	15202
9.5 - 17	15203

